


TD-3261

Blood Pressure and Blood Glucose Monitor



Telemedicine without time difference!

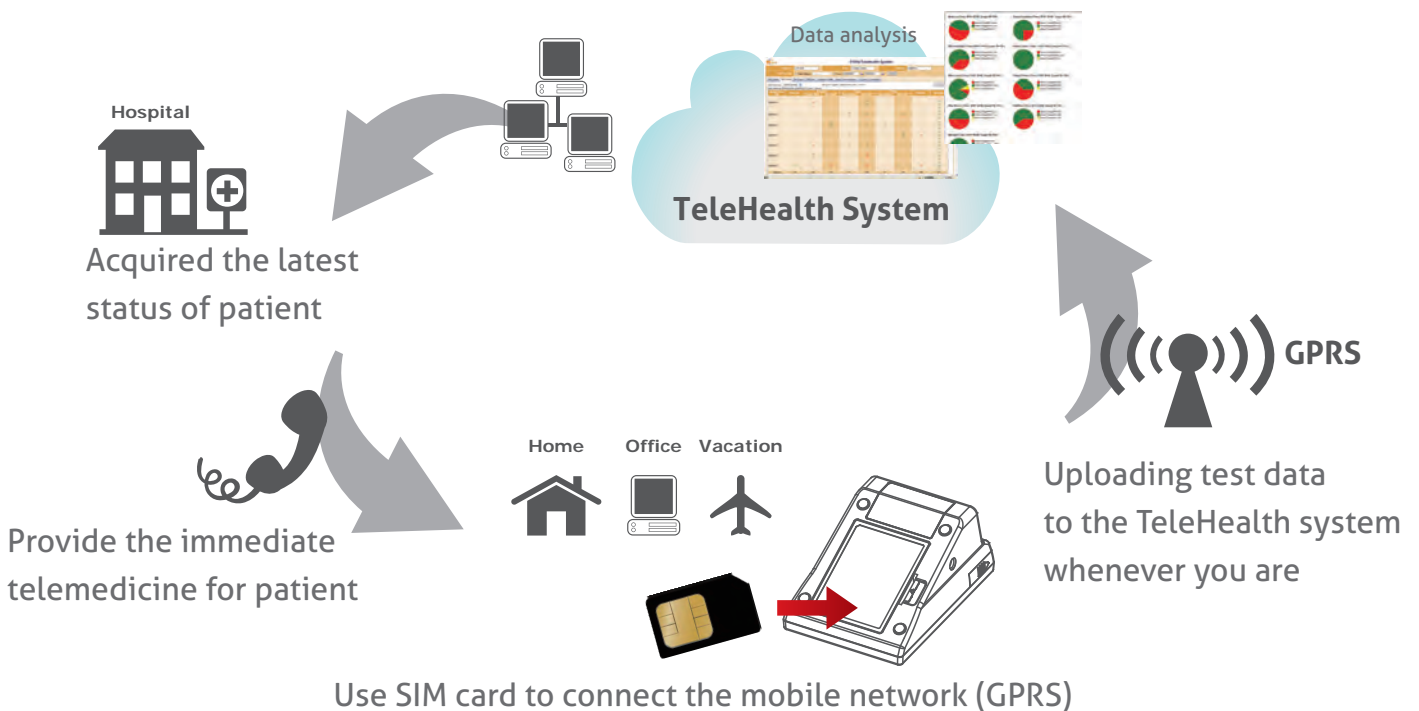

Blood Pressure and Blood Glucose Monitor



Blood Pressure monitor



Clever inflation technology



Irregular Heartbeat (IHB) detection



Automated Averaging Function



Smart Auto-Cycling Function



Blood Glucose monitor



No-coding blood glucose test strip



Pre-meal (AC) and Post-meal (PC) records



Strip ejection



SPECIFICATIONS

Power source	Rechargeable Li-Ion Battery and External DC 6V
Size of monitor w / o cuff	147mm (L) x 105mm (W) x 80mm (H), 500g (include battery)
Memory	Maximum 864 memory records
Data transmission	Bluetooth smart (TD-3261B) / GPRS (TD-3261G)

Blood Glucose monitor

Enzyme Type	GOD
Sample Size / Reaction Time	0.5 μ L / 5 seconds
Measurement unit	mg/dL or mmol/L (switchable)
Measurement Range	20 to 600 mg/dL (1.1 to 33.3mmol/L)
Precision	\pm 5% with respect to Standard
Accuracy	\pm 15mg/dL if < 100mg/dL; \pm 15% if \geq 100mg/dL

Blood Pressure monitor

Measurement unit	mmHg or Kpa (switchable)
Systolic Measurement Range	60 mmHg -250 mmHg
Diastolic Measurement Range	30 mmHg -180 mmHg
Pulse Rate Measurement Range	40 -199 beats / minute
Accuracy of Pressure	\pm 3 mmHg or \pm 2% of reading
Accuracy of Pulse rate	\pm 4% of reading



TaiDoc Technology Corp.

B1-7F., No. 127, Wugong 2nd Rd., Wugu Dist.,
New Taipei City 248, Taiwan
Tel : +886-2-6625-8188 Fax : +886-2-6625-0288